


DH59

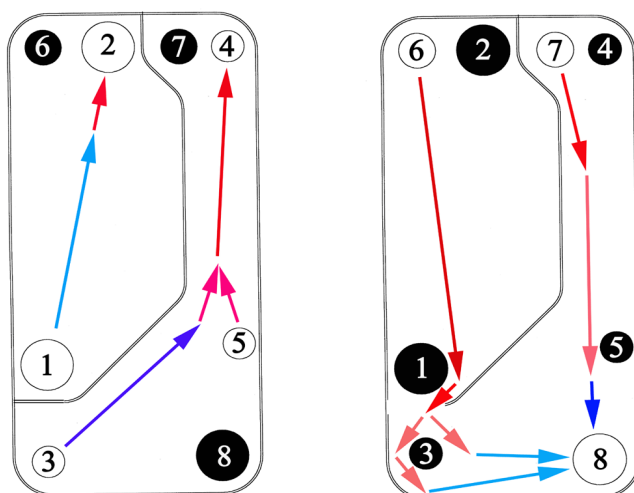

Length 529,85mm Width 267,85mm
 Depth $11 + n \times 1,8$ mm, weight empty $4 + n \times 0,41$ kg
 n = number of plates

Front			Back	
Number of plates	Radiator heating	Pressure drop	Domestic hot water	Pressure drop
	100-63/60-80°C	Prim/Sec	65-22/10-55°C	Prim/Sec
	kW	kpa	l/sek (kW)	kpa
12	26	8,9 / 5,4	0,20 (33)	25 / 30
20	52	10,9 / 7,8	0,30 (56)	23 / 25
24	64	11,1 / 8,3	0,38 (71)	25 / 27
30	83	11,6 / 9,1	0,49 (92)	25 / 29
36	102	11,9 / 9,7	0,60 (113)	25 / 30
40	115	12,2 / 10,2	0,66 (124)	25 / 30
50	147	12,6 / 11,2	0,83 (156)	25 / 30
60	178	12,9 / 12,1	1,00 (188)	25 / 30
70	210	13,3 / 13,2	1,15 (216)	25 / 30
80	242	13,7 / 14,4	1,32 (248)	25 / 30
100	305	14,5 / 17,1	1,60 (301)	25 / 30
120	369	15,5 / 20,3	1,90 (358)	25 / 30

Connections	Threaded BSP	Length
1. Radiator inlet	2"	25 mm
2. Radiator outlet	2"	25 mm
3. Cold water inlet	1"	25 mm
4. Hot water outlet	1"	25 mm
5. Hot water circulation inlet	1"	25 mm
6. District heating inlet radiator section	1"	25 mm
7. District heating inlet tap-water section	1"	25 mm
8. District heating outlet from connections 6+7	2"	25 mm